



**FIELD
LOADER**



FIELD LOADERS

1300 | 1500 | 1800 | 2400

Batco Field Loaders include all the benefits of the standard hopper Belt Conveyors but feature an extended low-profile hopper, with unique collapsible design.

- Optional self-propelled kit available on all models

1300 SERIES 1500 SERIES 1800 SERIES 2400 SERIES

10" Tube | 13" Belt

- Capacity up to 4,500 bu/hr
- 35' or 45' lengths available

10" Tube | 15" Belt

- Capacity up to 6,000 bu/hr
- 35' or 45' lengths available

14" Tube | 18" Belt

- Capacity up to 8,000 bu/hr
- 35' length available

14" Tube | 23.5" Belt

- Capacity up to 14,000 bu/hr
- 35' length available

DRIVE OPTIONS 1300 | 1500 | 1800 | 2400

- Pinch S-Drive
 - Gas
 - Electric

- Pinch Top Drive
 - Electric
 - Hydraulic (1300, 1500 & 1800)

ALSO AVAILABLE

2435 Railcar Unloader with lower profile hopper to suit above-track loading

- Available with gas or electric Pinch S-Drive
- Capacity up to 14,000 bu/hr
- Ultra low hopper = 4" hopper height

SPECIFICATIONS

1300 SERIES CONVEYORS

MODEL	BELT LENGTH	WEIGHT LBS	UP-OPERATION		DOWN-OPERATION		WIDTH	HP PTO	HP ELEC	HP GAS	HP HYD. (Cu.in.)
			A	B	A	B					
1314 LP	28'4"	526	N/A	N/A	2.9	5.5	3	N/A	5 HP	6.5 HP	4.5 (H SERIES)
SWING TRANSFER	34'6"	570	N/A	N/A	N/A	N/A	N/A	N/A	5 HP	N/A	4.5 (H SERIES)
1330 TD	58'8"	1409	13.5	9.5	9.6	11.1	7.5	N/A	5 HP	N/A	5.9 (H SERIES)
1335 TD	68'8"	1506	16.3	11.3	10.8	12.3	7.5	N/A	5 HP	N/A	5.9 (H SERIES)
1340 TD	78'8"	1603	18.3	14.5	9.5	15.1	7.5	N/A	7.5 HP	N/A	5.9 (H SERIES)
1345 TD	88'8"	1700	21.3	18.4	12	19	7.5	N/A	7.5 HP	N/A	5.9 (H SERIES)
1335 FL	81'	1826	16.9	16.2	13.2	18.3	7.5	N/A	7.5 HP	27 HP	N/A
1345 FL	101'	2011	21.9	20.6	13.2	22	7.5	N/A	7.5 HP	27 HP	N/A
1335 FLTD	76'6"	1500	16.9	13.6	11.9	14.6	7.5	N/A	7.5 HP	N/A	6.2 (2000 SERIES)
1345 FLTD	96'6"	1730	21.9	19.5	12.7	19.4	7.5	N/A	7.5 HP	N/A	6.2 (2000 SERIES)
1355	113'10"	2268	26.2	22.2	14.9	23.6	9	30 HP	7.5 HP	27 HP	N/A

1800 SERIES CONVEYORS

MODEL	BELT LENGTH	WEIGHT LBS	UP-OPERATION		DOWN-OPERATION		WIDTH	HP PTO	HP ELEC	HP GAS	HP HYD. (Cu.in.)
			A	B	A	B					
1814 LP	29'	840	N/A	N/A	3	5.8	3.8	N/A	7.5 HP	9 HP	6.2 (2000 SERIES)
1835 FL	86'11"	2740	16.9	17.5	13.3	18.2	7.5	25 HP	10 HP	N/A	N/A
1835 FLTD	81'2"	2200	16.9	15.9	13.7	15.1	7.5	N/A	10 HP	N/A	6.2 (2000 SERIES)
PITSTOP	47'	2970	N/A	N/A	2.8	4.5	7.9	N/A	7.5 HP	N/A	6.2 (2000 SERIES)

2400 SERIES CONVEYORS

MODEL	BELT LENGTH	WEIGHT LBS	UP-OPERATION		DOWN-OPERATION		WIDTH	HP PTO	HP ELEC	HP GAS	HP HYD. (Cu.in.)
			A	B	A	B					
SWING TRANSFER	45'3"	1300	N/A	N/A	N/A	N/A	N/A	N/A	10 HP	N/A	8.0 (2000 SERIES)
2435 FL	94'6"	3350	17.3	16.2	14	16.8	7.5	N/A	20 HP	35 HP	N/A
2435 FLTD	87'3"	2700	17.3	15.8	14.1	15	7.5	N/A	20 HP	N/A	N/A
2465	141'2"	5081	32.1	23.4	12.5	26	*11.6	60 HP	25 HP	N/A	N/A
2475	161'2"	5396	36.1	32	14.3	35.8	*11.6	70 HP	30 HP	N/A	N/A
2485	181'2"	6153	42.3	32.6	13.7	38.6	*11.6	80 HP	30 HP	N/A	N/A
2495	201'2"	6630	47.1	41.5	14.9	48.5	*11.6	80 HP	40 HP	N/A	N/A
24105	221'2"	8305	52.5	40.7	16.3	49.7	*11.6	90 HP	40 HP	N/A	N/A
24110	231'2"	9495	53.9	45.3	17.1	54.7	*11.6	100HP	50 HP	N/A	N/A
24120	251'2"	9770	60	53.4	18.4	64.6	*11.6	120HP	50 HP	N/A	N/A
2400 PITSTOP	52'10"	3260	N/A	N/A	3	5.3	7.9	N/A	10 HP	27 HP	8.0 (2000 SERIES)


1500 SERIES CONVEYORS

MODEL	BELT LENGTH	WEIGHT LBS	UP-OPERATION		DOWN-OPERATION		WIDTH	HP PTO	HP ELEC	HP GAS	HP HYD. (Cu.in.)
			A	B	A	B					
1515 LP	30'8"	642	N/A	N/A	2.8	6.2	3.8	N/A	5 HP	9 HP	5.9 (H SERIES)
SWING TRANSFER	34'6"	700	N/A	N/A	N/A	N/A	N/A	N/A	7.5 HP	N/A	5.9 (H SERIES)
1530 TD	60'2"	1483	14	10.3	9.3	11.6	7.5	N/A	7.5 HP	N/A	6.2 (2000 SERIES)
1535 TD	70'2"	1582	16.8	12	10.7	12.8	7.5	N/A	7.5 HP	N/A	6.2 (2000 SERIES)
1540 TD	80'2"	1681	18.8	15.2	11.2	15.5	7.5	N/A	7.5 HP	N/A	6.2 (2000 SERIES)
1545 TD	90'2"	1780	21.5	19.1	11.9	19.5	7.5	N/A	10 HP	N/A	6.2 (2000 SERIES)
1535 FL	85'	1950	17	17.3	12.5	19.1	7.5	N/A	10 HP	27 HP	N/A
1545 FL	105'	2275	22.9	23.7	12.4	25.8	7.5	N/A	15 HP	27 HP	N/A
1535 FLTD	80'5"	1630	17	15.6	11.3	17	7.5	N/A	10 HP	N/A	6.2 (2000 SERIES)
1545 FLTD	100'5"	1936	22.9	21.4	13.2	22	7.5	N/A	15 HP	N/A	6.2 (2000 SERIES)
1555	115'3"	2354	26.3	22.2	14.9	23.6	9	30 HP	10 HP	27 HP	N/A
1565	135'6"	2997	31.4	22.4	11.6	26.1	11	30 HP	15 HP	27 HP	N/A
1575	155'	3252	36.6	30.9	12.6	36.2	11	40 HP	20 HP	27 HP	N/A
1585	175'	3734	41.7	35.2	14.2	41.7	11.3	40 HP	20 HP	35 HP	N/A
1590	185'	3850	44.2	39.5	14.9	46.7	11.3	50 HP	25 HP	35 HP	N/A
15100	205'	4450	49	39.7	13.5	48.3	11.3	50 HP	25 HP	35 HP	N/A

2000 SERIES CONVEYORS

MODEL	BELT LENGTH	WEIGHT LBS	UP-OPERATION		DOWN-OPERATION		WIDTH	HP PTO	HP ELEC	HP GAS	HP HYD. (Cu.in.)
			A	B	A	B					
SWING TRANSFER	41'6"	900	N/A	N/A	N/A	N/A	N/A	N/A	7.5 HP	N/A	6.2 (2000 SERIES)
2035	77'10"	2765	16.1	16.9	10.7	17.4	7.5	40 HP	15 HP	N/A	N/A
2035 TD	71'3"	2145	16.1	13.4	10.7	14	7.5	N/A	15 HP	N/A	N/A
2045	97'10"	3098	20.8	21.4	13	22.7	7.5	40 HP	15 HP	N/A	N/A
2055	117'10"	3650	26.1	24.7	13.8	24	10.3	50 HP	20 HP	N/A	N/A
2065	137'10"	4826	31.1	22.3	12.2	25.3	*11.6	60 HP	25 HP	N/A	N/A
2075	157'10"	5126	36.3	31.1	13.7	35.3	*11.6	60 HP	30 HP	N/A	N/A
2085	177'10"	5868	40.7	32.1	12.7	38.1	*11.6	70 HP	30 HP	N/A	N/A
2095	197'10"	6127	46.4	40.7	14.4	48	*11.6	80 HP	40 HP	N/A	N/A
20105	217'10"	7990	51.1	39.6	16.6	49.1	*11.6	80 HP	40 HP	N/A	N/A
20110	227'10"	9155	54	44.4	17.1	54.1	*11.6	100HP	50 HP	N/A	N/A
20120	247'10"	9430	59.3	52.1	18.4	63.8	*11.6	100HP	50 HP	N/A	N/A

*AXLE EXTENDS TO 14.8'
A UP IS CONVEYOR DISCHARGE HEIGHT (FROM BOTTOM OF DISCHARGE HOOD) AT 30 DEGREES | A DOWN IS OVERALL CONVEYOR HEIGHT (FROM TOP OF DISCHARGE HOOD)




Custom Configured

Batco Conveyors can be "Custom Configured" to fit almost any requirement

Depending on the model, choose from gas, electric, PTO or hydraulic drive options. The unique Batco Pinch S-Drive can be mounted almost anywhere along the tube – at the lower end to accommodate PTO drive, or higher on the tube for other drives to allow longer reach into bins. An electric top drive is also available for models under 45 feet. Optional swing hoppers, portable transfers or self-propelled kits add versatility. Most Batco models are available in corrosion resistant stainless steel to accommodate bulk material handling. Advanced custom belt conveyor configurations can be accommodated by the factory. See your dealer for details.

- Hydraulic Systems: H Series requires 12-16 gal/min; 2000 Series requires 16-20 gal/min
- 1314 LP: 6 1/2 HP Honda comes with 6:1 gear reduction
- 1814 LP/1515 LP: 9 HP Honda comes with 6:1 gear reduction
- Custom under bin systems and stationary conveyors are also available in 8", 10" and 14" diameter tubes

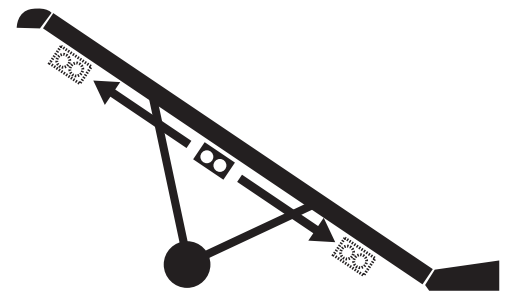

REMEMBER!

Safety is everyone's business! Some items shown with safety shields removed for clarity. Do not operate with safety shields removed. Do not modify. Use only for intended purpose. Read manual before operating.

BATCO 

**NEW
PRODUCT**



BATCO
2045
FIELD LOADER

14" Tube | 20" Belt

Available in 45' length and capacity up to 14,000bph

Comes with a Pinch S-Drive in Gas or Electric and features a re-designed transition providing higher capacity.

877.667.7421
batcomfg.com

Handling What's Important.

AGI 
AG GROWTH INTERNATIONAL