

**RITEWAY** 

**HEAVY  
HARROW  
SERIES**

**HH 8200**

**HEAVY HARROW SERIES**



HEAVY HARROW SERIES

HH8200

**RITEWAY** 




**HEAVY  
HARROW  
SERIES**

**HH8200**

**TACKLE YOUR RESIDUE.**

Spread and break up trash and residue. Rake and level the ground. Minimize weeds. The Rite Way Heavy Harrow is engineered to prepare your field. Reliable, efficient, and with a reputation to consistently follow the unique profile of any field, the Rite Way Heavy Harrow can tackle any challenge now, and for years to come.

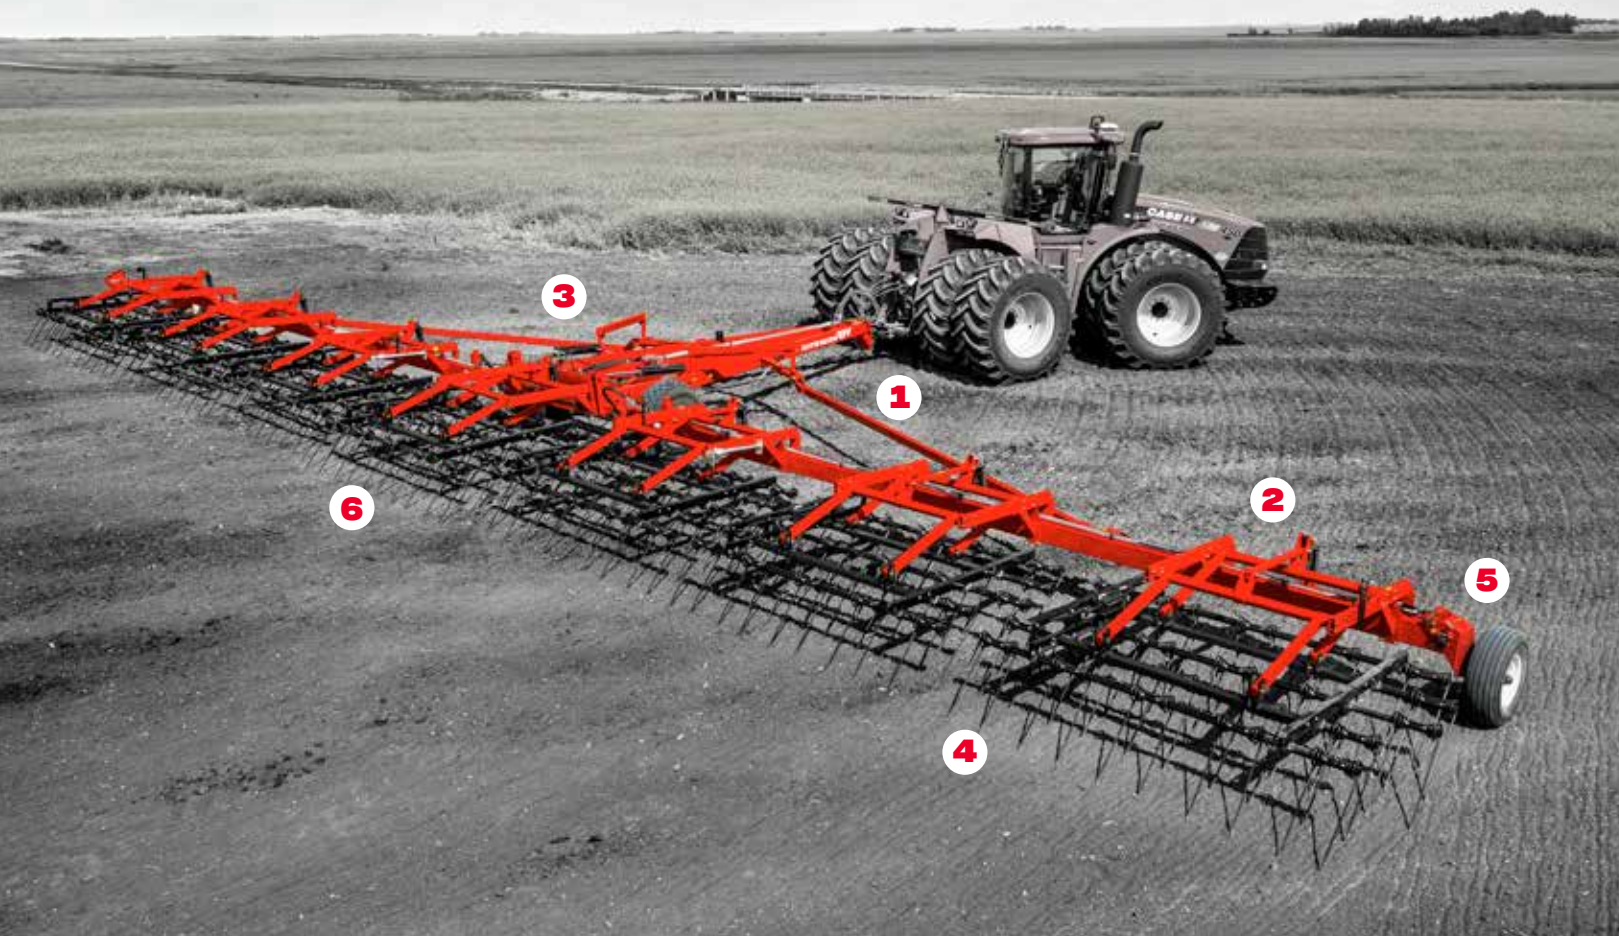

**HEAVY HARROW FEATURES**

**1 - Solid Tube Draft Arms.**

No cables mean draft arms lock into place safely and securely with an Auto Lock mechanism.

**2 - Parallel Linkage System.**

Each harrow section floats independently for even wear and pressure, regardless of tine angle.

**3 - Flexible Knuckle System.**

Two-way flex on the tool bar between harrow sections prevents uneven wear and promotes uniform pressure.

**4 - Tougher Tines.**

Carbide and non-carbide tips, 28" tines in 9/16" or 5/8" diameter; In-cab hydraulically adjustable from 40° to 85°.

**5 - Ready to Move.**


Auto-fold, activated from the cab, takes the Heavy Harrow from field to transport position in minutes with our patented Field Transport Pivot Wheel system.

**6 - Fit to Travel.**

Transport widths range from 9'2" (2.8m) to 14'6" (3.4m) accommodating a variety of roads and highways.

**FLEXIBLE KNUCKLE SYSTEM**

FOR EVEN AND RELIABLE WORK.

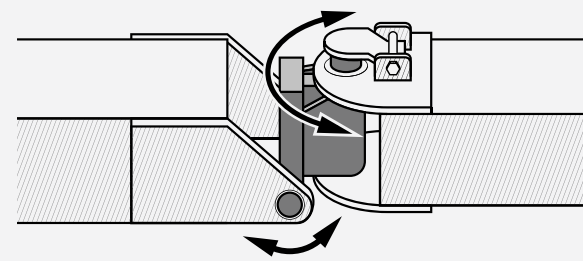

This strong and durable connection between frame and wings can handle any land contour - hill, slope and valley.

**STANDARD EQUIPMENT:**


- Hydraulically controlled tine angle (40° to 85°)
- 9/16" x 28" harrow tines
- 5-bar, 18" (460mm) spacing between rows
- Auto-fold with Rite Way hydraulic pivot wheel system
- Parallel link harrow system
- Adjustable hitch height with perfect hitch clevis
- Heavy duty wing, centre bar and A-frame
- Solid pull draft arm
- Safety chains
- Light package

**OPTIONAL EQUIPMENT:**

- Acre meter-ready
- Heavy duty 5/8" x 28" harrow tines
- Granular applicator
- Carbide tipped wear resistant tines

**PARALLEL LINKAGE SYSTEM**

FOR EVEN PRESSURE AND WEAR.

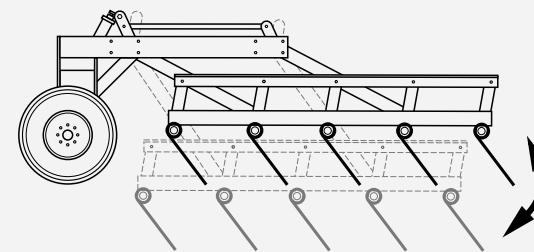

Heavy harrows have even force front to back of the disc gangs as each section floats independently.



**HH8200**  
STANDARD TRANSPORT  
14'9" - 16'3" Transport Width

**HH8200-NT**  
NARROW TRANSPORT  
9'2" - 9'10" Transport Width







# MADE TO WORK. BUILT TO LAST.

Wide or narrow, shallow or deep. The Rite Way Heavy Harrow is ideal to prepare your land for what's to come. Customize your equipment to be as aggressive as you need with a field-proven design and a range of sizes and working width options.

## SPECIFICATIONS:

### NARROW TRANSPORT (NT)

MODEL	WORKING WIDTH	HARROW CONFIGURATION	TRANSPORT LENGTH	TRANSPORT WIDTH	TRANSPORT HEIGHT	WEIGHT
HH-8240-NT	<b>40'</b> (12.2 m)	<b>3 x 6' 6", 2 x 11'</b> (3 x 2.0 m , 2 x 3.4 m)	<b>36' 9"</b> (11.2 m)	<b>9' 10"</b> (3.0 m)	<b>11' 4"</b> (3.5 m)	<b>9,250 lbs</b> (4,196 kg)
HH-8250-NT	<b>50'</b> (15.2 m)	<b>1 x 6' 6", 4 x 11'</b> (1 x 2.0 m , 4 x 3.4 m)	<b>41' 2"</b> (12.5 m)	<b>9' 2"</b> (2.8 m)	<b>11' 4"</b> (3.5 m)	<b>10,245 lbs</b> (4,647 kg)
HH-8262-NT	<b>62'</b> (18.9 m)	<b>3 x 6' 6", 4 x 11'</b> (3 x 2.0 m , 4 x 3.4 m)	<b>48' 2"</b> (14.7 m)	<b>9' 2"</b> (2.8 m)	<b>11' 4"</b> (3.5 m)	<b>12,225 lbs</b> (5,545 kg)
HH-8273-NT	<b>73'</b> (22.3 m)	<b>1 x 6' 6", 6 x 11'</b> (1 x 2.0 m , 6 x 3.4 m)	<b>52' 2"</b> (15.9 m)	<b>9' 2"</b> (2.8 m)	<b>11' 4"</b> (3.5 m)	<b>13,900 lbs</b> (6,305 kg)

### STANDARD TRANSPORT

MODEL	WORKING WIDTH	HARROW CONFIGURATION	TRANSPORT LENGTH	TRANSPORT WIDTH	TRANSPORT HEIGHT	WEIGHT
HH-8245	<b>45'</b> (13.7 m)	<b>2 x 6' 6", 3 x 11'</b> (2 x 2.0 m , 3 x 3.4 m)	<b>40' 6"</b> (12.5 m)	<b>14' 9"</b> (4.5 m)	<b>11' 8"</b> (3.5 m)	<b>10,100 lbs</b> (4,581 kg)
HH-8255	<b>55'</b> (16.7 m)	<b>5 x 11'</b> (5 x 3.4 m)	<b>44' 8"</b> (13.7 m)	<b>14' 9"</b> (4.5 m)	<b>11' 8"</b> (3.5 m)	<b>11,950 lbs</b> (5,420 kg)
HH-8268	<b>68'</b> (20.2 m)	<b>2 x 6' 6", 5 x 11'</b> (2 x 2.0 m , 5 x 3.4 m)	<b>51' 8"</b> (15.8 m)	<b>14' 8"</b> (4.4 m)	<b>11' 8"</b> (3.5 m)	<b>13,560 lbs</b> (6,151 kg)
HH-8278	<b>78'</b> (23.7 m)	<b>7 x 11'</b> (7 x 3.4 m)	<b>55' 10"</b> (17.2 m)	<b>14' 6"</b> (4.3 m)	<b>11' 4"</b> (3.4 m)	<b>14,720 lbs</b> (6,677 kg)
HH-8290	<b>90'</b> (27.4 m)	<b>2 x 6' 6", 7 x 11'</b> (2 x 2.0 m , 7 x 3.4 m)	<b>64' 10"</b> (20 m)	<b>16' 3"</b> (4.9 m)	<b>11'</b> (3.1 m)	<b>16,500 lbs</b> (7,484 kg)

### TIRES

MODEL	MAIN FRAME	WING AXLE
HH-8240-NT to HH-8273-NT	<b>16.5L x 16.1 - 10 Ply</b>	<b>11L x 15 - 8 ply</b>
HH-8245 to HH-8278	<b>16.5L x 16.1 - 10 ply</b>	<b>11L x 15 - 8 ply</b>
HH-8290	<b>21.5L x 16.1 - 10 ply</b>	<b>16.5L x 16.1 - 10 ply</b>

We are continuously improving our products. Design, specifications, and material are subject to change without notice.

For more information on the Heavy Harrow, or other land improvement equipment, visit your local Rite Way equipment dealer, or visit